



ЗАО «Серебряный дракон»

Закрытое акционерное общество

«Международная компания «Серебряный дракон»

680000, г. Хабаровск, ул. Комсомольская, д.28 оф.18,

тел./факс (4212) 750-562, e-mail: mail@sdlc.ru, www.sdlc.ru

ОКПО 81960420, ОГРН 1072721019491, ИНН/КПП 2721152035/272101001

Станок для гибки акрила

Цена DDP Хабаровск 175 000 руб.

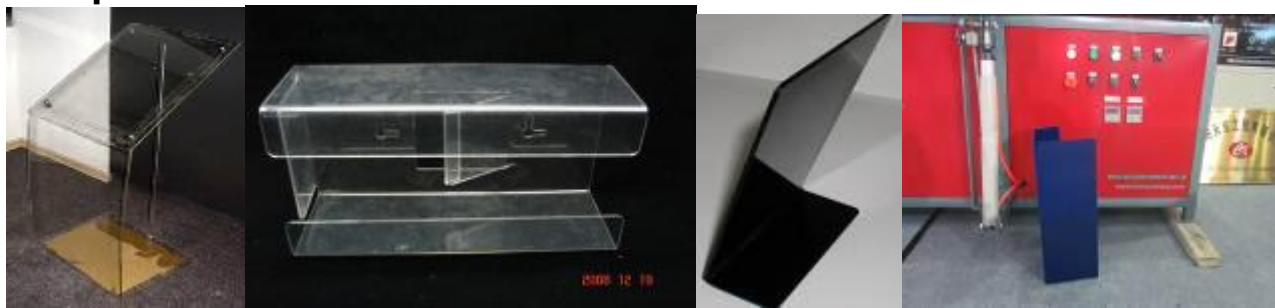
Срок поставки в течение 20 дней с момента предоплаты.



- 1.Domestic first manufactured-Infrared plating barium heater and unique energy saving heat insulation device make the heating temperature equally ,meantime can make heat radiation upward, save 40% energy than ordinary machine.
- 2.When bending,the heater can shift and interrupt power supply. To make the material cooling and shaping more rapidly,save more energy,operation more reasonable and humanity.
- 3.Our special multifunction fixing position and protractor,can make the bending angle adjustable,steerable,accurate and convenient.
- 4.Automatically water cooling system,can make the machine has the line heating function.
- 5.The working table is thick stainless steel platform,avoid the acrylic damaging when it is working.
- 6..The machine with special Double leakage automatic protection function, safety in use.
- 7.Integration of high strength of frame, stable performance, convenient for transportation and installation.
- 8.Wide usage: the machine can process acrylic board; ABS board; PVC board; Sunshine board and etc.
- 9.Automatic bending function.can bend automaticly according to plate requirements to.cool and finalize the design after bending, then flap plate to return.Remove bended workpiece. Fully realized automation.

Technical data:

Model	BZG-600-Z	BZG-1200-Z	BZG-1600-Z	BZG-2400-Z
Power	1KW	2KW	2KW	3KW
Effective bending width	600MM	1220MM	1600MM	2400MM
Voltage	220V 50HZ			
Effective bending length	no restrict			
Maximum heating temperature	650 degree			
Bending Angle	The 0-179 degree arbitrary adjustable			
Bending Type	Acute Angle、 Round arc for choice			
Each corner bending time	7-12 seconds			
Material thickness	0mm-8mm			
Mould press lever working way	pneumatic			
Mould press lever pressure	0KG-150KG			
Mould press lever working speed	1"-10"/time(adjustable)			
Maximum volume of water tank	30L			
Applicable industry	plastic material bending			

Sample:

Генеральный директор _____

Савватеев В.А.

[Контактные данные:](#) тел. 914-318-43-57, Skype: savva56